

# Mobile Smart Screen

## User Manual



# Catalogue

1. Foreword

2. Warning

3. Packing List

4. Installation Instruction

5. Product Specification

6. Adjustable Angle And Height

7. Ports Description And Function

8. Button Description

9. Touch Function Description

10. Battery Description

11. Screen Projection

12. Software Downloading

13. Remote Control Instruction

# 1. Foreword

Before starting using the machine, please read this manual carefully to understand the use of the machine and precautions.

## 2. Warning

- ★ Only the original power adapter accessories can be used.
- ★ The gaps and openings on the machine are used for ventilation and heat dissipation, do not plug or cover up these gaps and openings.
- ★ Do not use or store the machine in dusty, humid, high-temperature environment.
- ★ When the machine fails, do not disassemble and repair it by yourself, contact the original factory or dealer to solve it.
- ★ Avoid stepping on the power cord or power adapter, to avoid the danger of leakage caused by line damage. if the lead of the power adapter is damaged, do not continue to use it, otherwise it may be dangerous.
- ★ In rainy weather or when you do not use this machine for a long time, please unplug the power cord.
- ★ When using, please do not place the machine on the edge of the table or where children can easily reach, it to avoid damage or injury to the machine to the kids.
- ★ Do not squeeze the display during transportation, and do not use sharp objects or hard objects to hurt the display, so as not to cause damage to the display.
- ★ Please use a dry soft cloth or a soft cloth slightly dipped in soft cleaning to clean the machine. Do not use any kind of solvent such as alcohol or gasoline, other wise it may damage the surface treatment layer.
- ★ Make sure children understand the dangers of climbing this product. Dropping or shipping this product can cause serious life injury.
- ★ Do not place the product in an unstable or tilted position.
- ★ Be sure to organize the cable connected to the product in time to avoid tripping pulling or grabbing.

### 3. Packing List


After opening the package, please confirm the following parts.



Screen




Bluetooth remote control



Screwdriver



Base



AC adapter



Screws



User manual



Power cord



Stand

## 4. Installation Instruction

photo 1



photo 2



photo 3



photo 4



**Step 1:** Take out the base, stand, screwdriver from package(photo 1), insert stand into hole of base(photo 2-3-4), pull down them carefully, and use screwdriver to fix 4 screws at bottom of base(photo 5).

photo 5



photo 6



photo 7




photo 8



**Step 2:** Take out the screen from package, and connect it with stand, make sure the four buckles on the screen and stand are matched correspondingly one-to-one(photo 6-7-8).

photo 9



photo 10



photo 11



photo 12



**Step 3:** Connect the black cable to the type-c port in the back of screen (photo 9-10) .

photo 13



**Step 4:** Fix the small white cover to back of screen, there is an "↑" and 4 buckles, make them matchable(photo 11-12-13).

Then all installations have been finished.

## 5. Product Specification

|            |                           |                                                     |
|------------|---------------------------|-----------------------------------------------------|
| System     | CPU                       | Octa - Core                                         |
|            | RAM                       | 4GB / 8GB                                           |
|            | ROM                       | 64GB / 128G8                                        |
|            | Operating system          | Android 13                                          |
| Panel      | Display size              | 32-inch                                             |
|            | Resolution                | 1920 * 1080                                         |
|            | Touch method              | Capacitive touch                                    |
|            | Screen ratio              | 16:9                                                |
| Network    | /                         | Wifi                                                |
|            | 4G modem                  | Optional                                            |
| Interfaces | Audio out                 | 3.5mm output                                        |
|            | Bluetooth                 | Support Bluetooth 4.2                               |
|            | Type-C                    | Only for software upgrade                           |
|            | USB                       | 2.0                                                 |
|            | HDMI in                   | 1920*1080                                           |
|            | SIM card slot(optional)   | Work with 4G modem                                  |
| Other      | Power switch              | Power switch on the back                            |
|            | Gravity sensor            | Support                                             |
|            | Speaker                   | 4Ω5W*2                                              |
|            | Built-in camera           | 8MP                                                 |
|            | Microphone                | Support built in microphone                         |
|            | Input voltage             | 19V/5A                                              |
|            | Internal battery capacity | 10Ah (5hrs approx.)<br>15Ah (7hrs approx.) optional |

## 6. Adjustable Angle And Height


For better viewing experience, it supports adjustable tilt (forward-backward -20°-20°), deflection (left-right -15°-15°), rotation (clockwise 90°), lifting (up and down 180mm).



## 7. Ports Description And Function

Rich interfaces, supporting connection of various external machines.

|               |                                                                                |
|---------------|--------------------------------------------------------------------------------|
| Audio out     | 3.5 mm stereo audio out, used for connecting external amplifier or headphones. |
| USB           | Can be used for USB storage machine or mouse and keyboard receivers.           |
| HDMI IN       | For connecting external input signal.                                          |
| Type-C        | Only for factory software upgrade.                                             |
| SIM card slot | Work with 4G modem(optional).                                                  |

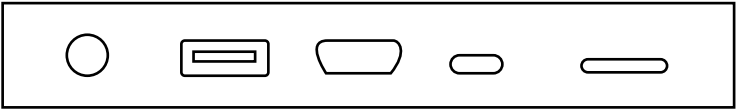

Audio out

USB 2.0

HDMI IN

Type-C

SIM card slot  
(optional)

## 8. Button Description

Please use the standard power adapter.



| Button | Function                                                                                                                                                                                                                                                                                                                                  |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | <p><b>Turn on :</b> Press button for 2-3 seconds to turn on the power.</p> <p>When in power on status:</p> <ol style="list-style-type: none"><li>1. Press the button for 2-3 seconds to choose: power off or restart;</li><li>2. Short press the button will enter standby status, short press again to back to normal display.</li></ol> |

When the machine is charging, please don't try to move it, to avoid loosening the power cord or leakage.

## 9. Touch Function Description

The machine comes with 10 points capacitive touch, can use the hand to do operation.



## 10. Battery Description

The base of this product contains a built-in rechargeable battery, which can be used for a period of time without connecting to other power sources, and when the power is exhausted, can connect a charger to charge the battery, when the charger is plugged into the DC hole of the base, the screen will display the charging status, and with the increase of the battery power until it is full.

### △ Note:

Charging while using the product is about 6 hours full, and the product will charge about 4 hours full while turning off state, fully charged equipment lifetime of about 4.5 hours to use close to 5 hours, there will be some difference depending on the situation. As the product usage time increases, the battery life decrease proportionally. To extend the life of the battery, it is recommended to charge the battery after a period of use. If the battery is full, please unplug the charger. After the battery is fully charged, do not continue charging. The battery can not be charged in extreme environments.

The standard usage time in the instruction manual is based on our laboratory test data, the actual time will be different due to the difference in usage conditions.

## 11. Screen Projection

Machine have wireless projection function, support different devices, below are instructions:

**Android mobile phone :** Mobile phone and machine are in the same network ➡ first time to use, open the EShare application, use the mobile phone scanning APP QR code to download the APP on the mobile phone, then open the EShare software on the phone to find the mirror function and click it to use.

**iPhone & MacBook :** iPhone/MacBook and machine are in the same network ➡ open the iPhone/MacBook shortcut menu ➡ click "screen mirroring" ➡ Select the name of the machine to be mirror ➡ The machine appears iPhone/MacBook screen image, and the mirror is successful.

**Computer :** Computer and the machine are in the same network, then download EShare windows version, open the computer and click on the mirror, then the computer will start mirroring.

## 12. Software Downloading


After turning on machine, then go to home page, find and enter "Play Store", you can download apps from inside.

**Notice:** When there is some apps could not install from "Play Store", please put apk file in USB disk, and insert to USB port of machine, and find and choose apk file to install from file management.

Below are some pre-install apps, apps details as below

| Software                                                            | Function                                                                                                                                                                                                  |
|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EshareServer                                                        | It is projection/mirror software, support android phone, iPhone, ipad, computer, etc to mirror to machine wirelessly. You can see instruction after opening software.                                     |
| MagicBoard                                                          | It is smart writing software, support to write, change the pen's size and color, save, add pages, etc. And it also supports to use it making annotations on any page via floating arrow icon in the side. |
| HDMI                                                                | The machine have HDMI input, it support to connect external HDMI signal.                                                                                                                                  |
| Camera                                                              | It will work if you buy device with camera.                                                                                                                                                               |
| Others pre-install apps, you can know after turning on the machine. |                                                                                                                                                                                                           |

### 13. Remote Control Instruction

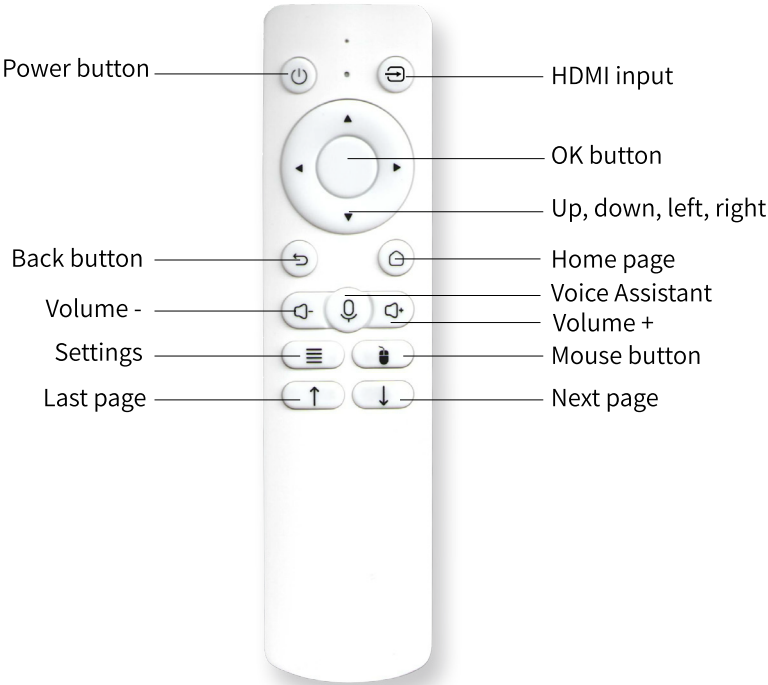

## (1) Button Function Description

- ① **Power button** : Press the button for 2-3 seconds to enter the power off option [Power off / restart].
- ② **HDMI input** : For connecting external signals.
- ③ **Up, down, left and right arrow button** : Move up, down, left and right to select the function.
- ④ **Ok button** : Function selection OK.
- ⑤ **Back button** : Press to return to the previous page.
- ⑥ **Home page** : Press to return to the main page.
- ⑦ **Volume + & Volume -** : Adjust the volume level.
- ⑧ **Voice Assistant** : Calling Voice Assistant.
- ⑨ **Settings** : Press to open the recent taskbar.
- ⑩ **Mouse button** : Press to enter mouse mode, and the screen shows the mouse, press up and down, left and right arrow button to move the indicator; press again to exit the mouse mode, wait for a while on the screen, and the mouse will automatically disappear.
- ⑪ **Last page & Next page** : Press to page up-down, you can brush TikTok and so on.

## (2) How To Pair Remote Control With Machine

**Step 1:** Press and hold down the "Back" button and "OK" button on the remote control at the same time for about 3-4 seconds until the indicator light blinks red, then release the buttons.

**Step 2:** Open the bluetooth in the system settings, find MeiAi in the bluetooth list, and click "Pair", after successful pairing, a bluetooth pairing success icon will be displayed on the top right of the screen, then you can use the remote control.

**Note :** Each remote control already be paired before package, this instruction just for in case.